





FLAT-PACKED, MAN-PORTABLE, MODULAR BUILDINGS



XPANDA

BIKESTORE





Ideal for siting in locations with limited access. Light enough to be man handled and with components that are small enough to fit through small passageways.

CONTACT INFO:





FLAT-PACKED, MAN-PORTABLE, MODULAR BUILDINGS





The Secure, Flat-Packed Bikestore

...that can go anywhere!







XPANDA BIKESTORE Accessories



XPANDA

BIKESTORE

The secure, flat-pack, manportable bikestore


Thanks to its **robust steel construction** and **flat pack design**, Bikestore can be simply carried to any location, **easily assembled** and used to keep your valuable bike secure. All the components are **man portable** meaning they can be carried through narrow passageways and alleys or even through your house, opening up **previously inaccessible places** – no need for costly cranes or forklifts and no specialist tools needed for assembly. Once assembled, the **fully galvanised** steel Bikestore is remarkably robust, with a real **double locking system** with **insurance rated locks** to BS3621 to deter the most determined thief.


Here's why Bikestore is so popular with bike owners...

- **Demountable:** Dismantles into flat-pack form quickly and easily for re-locating
- **Complete:** Everything required for assembly is in the kit
- Secure: Double locking system is standard
- **Simple:** No specialist tools are required for assembly, just a socket set
- Easy to follow instructions mean it's ready for use in 1 hour



Moss Green External (RAL 6005)





Only simple tools required














Chassis & floor

Pre-assembled 18mm thick grade OSB3 board screwed to a galvanised steel box profile frame.

Side Walls & Roof Panel

O.6mm box profile galvanised steel panels, galvanised steel frame sections at the edges of each panel. The roof section has two integral gutters for effective rainwater dispersal to all four corners of the container. The door is pre-mounted into the frame on stainless steel hinges, complete with two insurance rated locks and a central roller catch. Door width: 1138mm, hinges on the right, outward opening.

Technical specification

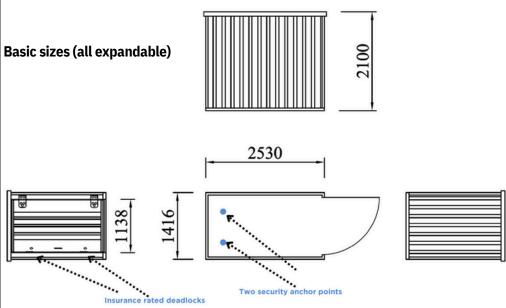

Weights & Dimensions

- Front Profile: 1500 x 2083mm Side Profile: 2614 x 2083mm Footprint: 1416 x 2530mm
- Weight: 257kg

All flat pack units are 370mm high All assembled units are 2083mm high

Powder Coating

Powder coating to outer skin is RAL 6005 Moss Green